


TUPRESTIGE CRUSH RESISTANT

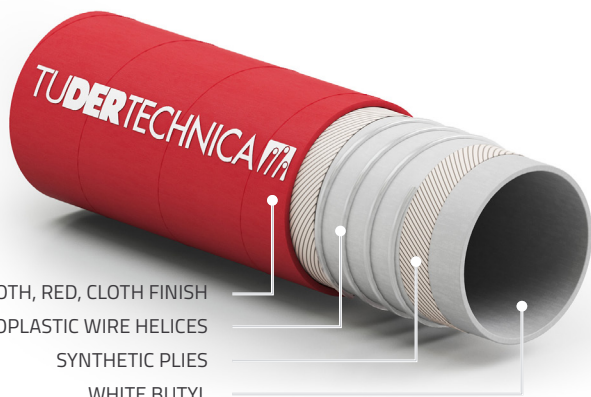

SMOOTH, RED, CLOTH FINISH
THERMOPLASTIC WIRE HELICES
SYNTHETIC PLYS
WHITE BUTYL

TECHNICAL CHARACTERISTICS

Temperature range : -40°C / +120°C (-40°F / +248°F)
Norm : ISO 1307 for dimensional tolerances



refer to guidelines for cleaning and sanitizing
on Tudertechnica website

GMP
CE 2023/2006

**PHthalates
REACH
FREE**

FDA

BfR

DM
21/03/1973

CE
1935/2004



MHLW
1959-2006



**ARRÊTÉ
FRANÇAIS**
09/11/1994

Premium grade low permeation suction and delivery hose suitable for a wide range of products. Recommended for wine and spirits. Crush resistant. Hose tested according to the main norms for food contact materials (FCM – Reg. (CE) 1935/2004). Manufactured according to GMP (Reg. (CE) 2023/2006).

DESCRIPTION

Tube

BlIR, white, phthalates free, tested in compliance with 1907/2006/CE (REACH). Meets FDA 21 CFR 177.2600; BfR XXI cat. 2; DM 21/03/1973 and subsequent amendments; REGULATION 1935/2004/CE; Japan Ministry of Health and Welfare Notice No.370,1959 and No.201,2006; 3-A RPSCQC for (62-02) Hose Assemblies; Arrêté du 09 novembre 1994.

Reinforcement

synthetic plies, thermoplastic wire helices

Cover

smooth, red, cloth finish. Abrasion, ageing and ozone resistant

Marking

TUDERTECHNICA TUPRESTIGE CRUSH RESISTANT

Inside diameter		Outside diameter		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
38	1,50	54	2,13	0,7	10	10	150	30	450	1,45	0,97	170	6,69
51	2,00	67	2,64	0,7	10	10	150	30	450	1,84	1,23	240	9,44
63,5	2,50	81,5	3,21	0,7	10	10	150	30	450	2,48	1,66	310	12,20
76	3,00	94	3,70	0,7	10	10	150	30	450	2,90	1,94	380	14,96

Data refer to ambient temperature (20°C). Other diameters, wall thickness, cover colours and pressure only on specific request

REV-2022-02-18